

Model CLSM-2000

Closed Loop Hall Effect

Description

The Model CLSM-2000 is a closed loop Hall effect current sensor that accurately measures DC and AC currents and provides electrical isolation between the current carrying conductor and the output of the sensor.

Features

- Noncontact measurement of high current
- Measures DC, AC and impulse currents
- Very fast response and high accuracy
- High overload capacity

Applications

- Variable speed drives for motors
- Welding Equipment
- Power supply Equipment
- Measure and control system
- Over current protection
- Protection of power semiconductors



Electrical Specifications

CLSM-2000

Nominal current (I _N)	±2000 A
Current range	0 to ±2500 A
Nominal output current (I _M)	400 mA
Turns Ratio	5000 / 1
Measuring Resistance (R _M)	0 to 10 Ω
Overall accuracy at 25°C	±0.5 % of I _N
Supply voltage (V _{dc})	±15 to ±24
Current consumption	20 mA + output current

Accuracy-Dynamic Performance

Zero current offset at 25°C	< ±0.6mA
Offset current temperature drift (-25°C to +85°C)	< ±0.3mA
Linearity	better than ±0.1%
Response time	better than 1μs
di / dt	better than 50A/μs
Frequency range	DC to 100KHz (-3dB)

General Information

Operating temperature	-25°C to +85°C
Storage temperature	-40°C to +100°C
Package	flame retardant plastic case, UL94V-0
Isolation voltage	10kV/50Hz/1min.
Output reference	To obtain a positive output on terminal M, input current must flow in the direction of the arrow (conventional flow)
Weight	892 grams
Mounting	Panel mount via 4 holes, 6mm dia.
Aperture size	1.57" (40 mm)
Output connection	3 Faston Terminals

Notes:


1. Busbar temperature should not exceed 100°C.
2. The dynamic performance is the best when the busbar fills the aperture.
3. Due to continuous process improvement, all specifications are subject to change without notice.

Mechanical Dimensions


All dimensions are in inches (millimeters)

Model CLSM-2000

Mechanical Dimensions

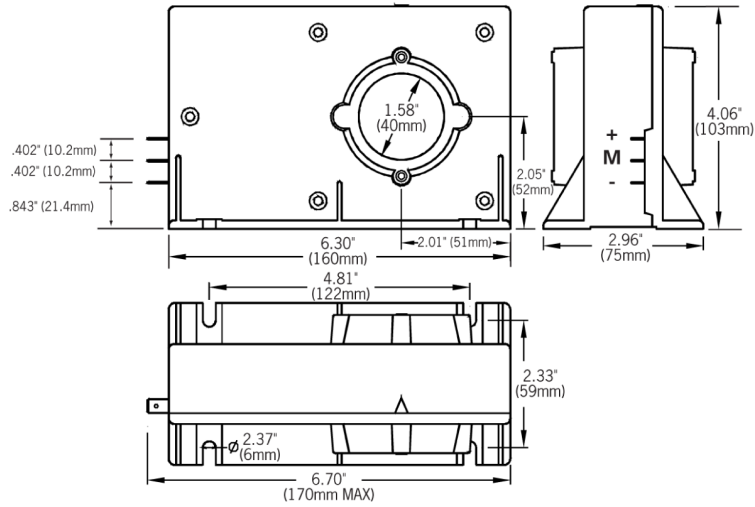

Connection Schematic

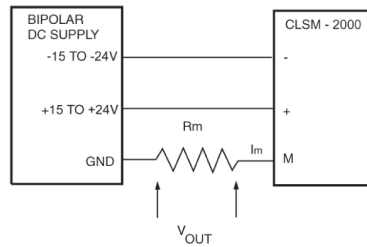

Note: Due to continuous process improvement, all specifications are subject to change without notice.