

MKP

Class X2 EMI/RFI Boxed Metallized polypropylene film



Features

- Metallized polypropylene
- High dv/dt
- Small size
- Low self inductance
- Low ESR

Applications

- EMI Filter
- Line by pass
- Across the line
- Antenna coupling

Specifications

Operating Temperature Range	-40°C to +110°C			
Capacitance Tolerance	±10% at 1 kHz, 20°C			
AC voltage (50/60 Hz)	CSA	ENEC	CQC	UL
	250 VAC	275 VAC	275 VAC	310 VAC
Dissipation Factor at 1 kHz and 20°C	Tan δ			
	.1% Max			
Insulation Resistance @20°C (<70% RH) for 1 minute at 100VDC applied	Capacitance	Terminal to Terminal	Terminal to Case	
	≤0.33uF	15000 MΩ	>30000 MΩ at 100VDC >5000 MΩ at 500VDC	
	>0.33uF	5000 MΩxuF	>30000 MΩ at 100VDC >5000 MΩ at 500VDC	
Self Inductance	≤1 nano-Henry per mm of lead spacing and lead length			
Dielectric Strength	Terminal to Terminal	C≤.0068uF, 1500 VAC or 2121 VDC applied for 60 Seconds C>.0068uF, 1000 VAC or 1768 VDC applied for 60 seconds Cut-off current: 2A ac or 10mAdc Current limiting resistance: 1Ω/V		
	Terminal to case	2050VDC applied between the terminals and case for 60 Seconds and 20°C		
Life Expectancy	1000 hours at 110°C at 125% of rated voltage with once every hour the voltage is increased to 1000 VAC for 0.1 seconds			
	Capacitance change	≤5% of initially measured value		
	Dissipation Factor change	≤0.15% at 1kHz		
	Insulation resistance change	≥100% of initially specified value (T-T) ≥3000 MΩ (Terminal to case)		
Humidity test	500 Hours at 90 to 95% RH, 40C and no voltage applied after which the following voltage will be applied for 1 minute to each capacitor. C≤0.0068uF 1500VAC, C>0.0068uF 1075VAC			
	Capacitance change	≤5% of initially measured value		
	Dissipation Factor change	≤0.15% at 1kHz		
	Insulation resistance change	≥50% of initially specified value (T-T) ≥15000 MΩ (Terminal to case)		
Impulse voltage (24 pulses)	C≤ 1uF Vp=2.5kVDC C> 1uF Vp=2.5kV √C			
Capacitance temperature coefficient	-200ppm/°C, ±100ppm/°C			
Construction	Metallized Polypropylene film			
Electrodes	Vacuum deposited Metal layers			
Coating	Flame retardant Solvent resistant plastic case with epoxy end fill (UL94V-0)			
Lead terminations	Lead free tinned copper leads			



MKP

Class X2 Boxed
metalized
polypropylene film

Standard part listing


Capacitance (µF)	IC PART NUMBER	dv/dt (V/µs)	LxHxT (mm)	S Lead Spacing (mm)	d Lead Wire Diameter (mm)
0.0047	472MKP275K	400	13x10x5	10	0.6
0.0047	472MKP275KC	500	10x8x4	7.5	0.6
0.0056	562MKP275KC	500	10x8x4	7.5	0.6
0.0056	562MKP275KD	400	13x9x4	10	0.6
0.0068	682MKP275K	400	13x9x4	10	0.6
0.0068	682MKP275KC	500	10x8x4	7.5	0.6
0.0082	822MKP275KC	500	10x8x4	7.5	0.6
0.0082	822MKP275KD	400	13x9x4	10	0.6
0.01	103MKP275K	400	13x10x5	10	0.6
0.01	103MKP275KC	500	10x8x4	7.5	0.6
0.01	103MKP275KE	300	18x11x5	15	0.8
0.015	153MKP275K	400	13x11x5	10	0.6
0.015	153MKP275KC	500	10x8x4	7.5	0.6
0.015	153MKP275KE	300	18x8x4	15	0.8
0.022	223MKP275K	400	13x11x5	10	0.6
0.022	223MKP275KB	300	18x9x4	15	0.8
0.022	223MKP275KC	500	10x8x4	7.5	0.6
0.033	333MKP275K	400	13x12x6	10	0.6
0.033	333MKP275KC	500	10x9x5	7.5	0.6
0.033	333MKP275KE	300	18x9x4	15	0.8
0.047	473MKP275K	300	18x9x4	15	0.8
0.047	473MKP275KC	500	10x10x5	7.5	0.6
0.047	473MKP275KD	400	13x10x5	10	0.6
0.056	563MKP275K	500	10x11x5	7.5	0.6
0.056	563MKP275KD	400	13x9.5x4.5	10	0.6
0.056	563MKP275KE	300	18x8x4	15	0.8
0.068	683MKP275K	300	18x11x5	15	0.8
0.068	683MKP275KC	500	10x12x6	7.5	0.6
0.068	683MKP275KD	400	13x10x5	10	0.6
0.082	823MKP275KC	500	10x12x6	7.5	0.6
0.082	823MKP275KD	400	13x11x5	10	0.6
0.082	823MKP275KE	300	18x10x5	15	0.8
0.1	104MKP275K	300	18x11x5	15	0.8
0.1	104MKP275KC	500	10x13x7	7.5	0.6
0.1	104MKP275KD	400	13x12x6	10	0.6
0.12	124MKP275KD	400	13x12x6	10	0.6
0.12	124MKP275KE	300	18x10.5x5	15	0.8
0.15	154MKP275K	180	26x14.5x6	22.5	0.8
0.15	154MKP275KA	350	15x11.5x6	12.5	0.8
0.15	154MKP275KD	400	13x14x8	10	0.6
0.15	154MKP275KE	300	18x13.5x7.5	15	0.8
0.22	224MKP275K	180	26x14.5x6	22.5	0.8
0.22	224MKP275KA	350	15x12.5x7	12.5	0.8
0.22	224MKP275KB	300	18x13x7	15	0.8

Capacitance (µF)	IC PART NUMBER	dv/dt (V/µs)	LxHxT (mm)	S Lead Spacing (mm)	d Lead Wire Diameter (mm)
0.22	224MKP275KD	400	13x14x8	10	0.6
0.33	334MKP275K	180	26x17x8.5	22.5	0.8
0.33	334MKP275KA	350	15x14x8.5	12.5	0.8
0.33	334MKP275KE	300	18x15.5x8	15	0.8
0.39	394MKP275KA	350	15x15x9	12.5	0.8
0.39	394MKP275KE	300	18x13.5x7.5	15	0.8
0.39	394MKP275KG	180	26x12x6	22.5	0.8
0.47	474MKP275KA	350	15x16x10	12.5	0.8
0.47	474MKP275KE	300	18x14x8	15	0.8
0.47	474MKP275K	120	32x18x9	27.5	0.8
0.47	474MKP275KB	180	26x16.5x7.5	22.5	0.8
0.56	564MKP275KE	300	18x15x9	15	0.8
0.56	564MKP275KG	180	26x14x7	22.5	0.8
0.56	564MKP275KH	120	31x14x6.5	27.5	0.8
0.68	684MKP275K	120	31x20x10	27.5	0.8
0.68	684MKP275KE	300	18x16x10	15	0.8
0.68	684MKP275KG	180	26x17x8	22.5	0.8
0.82	824MKP275KE	300	18x17.5x10	15	0.8
0.82	824MKP275KG	180	26x16x8	22.5	0.8
0.82	824MKP275KH	120	31x16x7.5	27.5	0.8
1	105MKP275K	120	31x20x11	27.5	0.8
1	105MKP275KG	180	26x19x10	22.5	0.8
1.2	125MKP275KG	180	26x19.5x9	22.5	0.8
1.2	125MKP275KH	120	31x17.5x9	27.5	0.8
1.5	155MKP275K	120	31x23.5x14	27.5	0.8
1.5	155MKP275KG	180	26x21x10	22.5	0.8
1.8	185MKP275KG	180	26x23x12.5	22.5	0.8
1.8	185MKP275KH	120	31x20.5x12	27.5	0.8
2.2	225MKP275K	120	31x26x18	27.5	0.8
2.2	225MKP275KG	180	26x24x13.5	22.5	0.8
2.2	225MKP275KGE	180	26x22x15	22.5	0.8
3.3	335MKP275KHF	120	31x26x17.5	27.5	1
3.3	335MKP275KH	120	31x33x18	27.5	1
3.3	335MKP275KJ	100	41.5x26x14.5	37.5	1
3.9	395MKP275KH	120	31x28x19	27.5	1
3.9	395MKP275KJ	100	41.5x27.5x16	37.5	1
4.7	475MKP275KHG	120	31x32.5x19	27.5	1
4.7	475MKP275KH	120	31x37x22	27.5	1
4.7	475MKP275KJ	100	41.5x32x19	37.5	1
5.6	565MKP275KH	120	31x34.5x21	27.5	1
5.6	565MKP275KJ	100	41.5x31.5x18.5	37.5	1
6.8	685MKP275KJ	100	41.5x39x24	37.5	1
8.2	825MKP275KJ	100	41.5x38x25	37.5	1
10	106MKP275KJ	100	41.5x45x30	37.5	1




MKP

Class X2 Boxed
metalized
polypropylene film

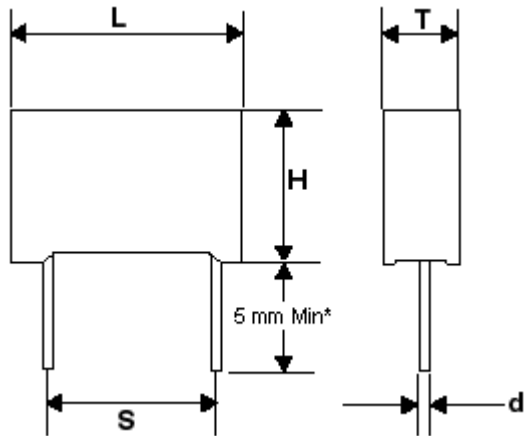

All dimensions in (mm)

* 17mm lead length available upon request

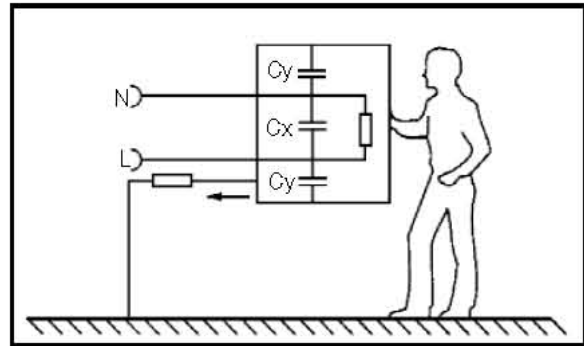

X2 capacitors are used to suppress electrical noise by reducing the input impedance of the device incorporating the capacitor.

X2 capacitors are connected across the supply line where failure of the capacitor will not result in personal exposure to electrical shock.

X2 capacitors are to be used in applications where the peak voltage is $\leq 1200V$.

Safety agency	Standard	Voltage	Class	Certificate number
UL	UL 1414 UL 1283	310	FOKX2* FOKY2^	E317135 E317132
CSA	C22.2, No.1	310	X	1041922
ENEC (SEMKO)	IEC 60384-14/ SE/0252-3	275	X2	SE/07119
CQC	GB/T14472-1998	275	X2	CQC07001021654 CQC07001021577

*Antenna coupling, Line bypass, Across the line

^Electromagnetic interference filter



3757 W. Touhy Ave., Lincolnwood, IL 60712 • (847)675-1760 • Fax (847) 675-2850 • www.illcap.com